



PARTS LIST
SUPERMATIC 12 GA. AUTOLOADING SHOT GUN
MODEL C-100

TROPHY	# 8230
DUCK	# 8240
CITATION	# 8220
DELUXE	# 8210 — 8211 — 8212
FIELD	# 8200 — 8201 — 8202

HOW TO ORDER REPAIR PARTS

The following information must be furnished when ordering replacement parts:

1. Model Name and Number
2. Catalog Number
3. Number and Name of Parts

SHOTGUN SHIPPING INSTRUCTIONS

CAUTION: For safety of all concerned — Be absolutely certain shotgun is empty . . . with no shells in chamber and magazine.

Shotgun should be securely packaged in a throwaway carton to prevent damage in transit. Do not ship shotgun to the factory in gun carrying case or other special containers which must be returned by our service department.

Shotgun should be shipped to the factory — Express Prepaid or insured parcel post.

REMEMBER: All Shipments to the factory must be Prepaid.

FACTORY SERVICE

If parts are to be fitted at the factory, send firearms marked for the attention of our **SERVICE DEPARTMENT**, furnishing complete and specific repair instructions. A cost estimate of the parts and labor charges will be immediately sent for your approval before work is started. Unless a flat rate charge is specified, a **MINIMUM** of \$6.50 will be charged on servicing firearms at the factory.


MINIMUM ORDER \$1.00

A minimum charge of \$1.00 is made on all orders where the normal cost would be less than \$1.00. Please note also the following paragraph. Additional parts will be added to meet the minimum charge.

PAYMENT

All parts shipments will be made by Parcel Post C.O.D. unless advance remittance is made. **PLEASE DO NOT SEND CASH OR STAMPS.** Checks, Money Orders, or Drafts are acceptable and will save you C.O.D. charges.

THE HIGH STANDARD MANUFACTURING CORPORATION, Hamden, Conn.

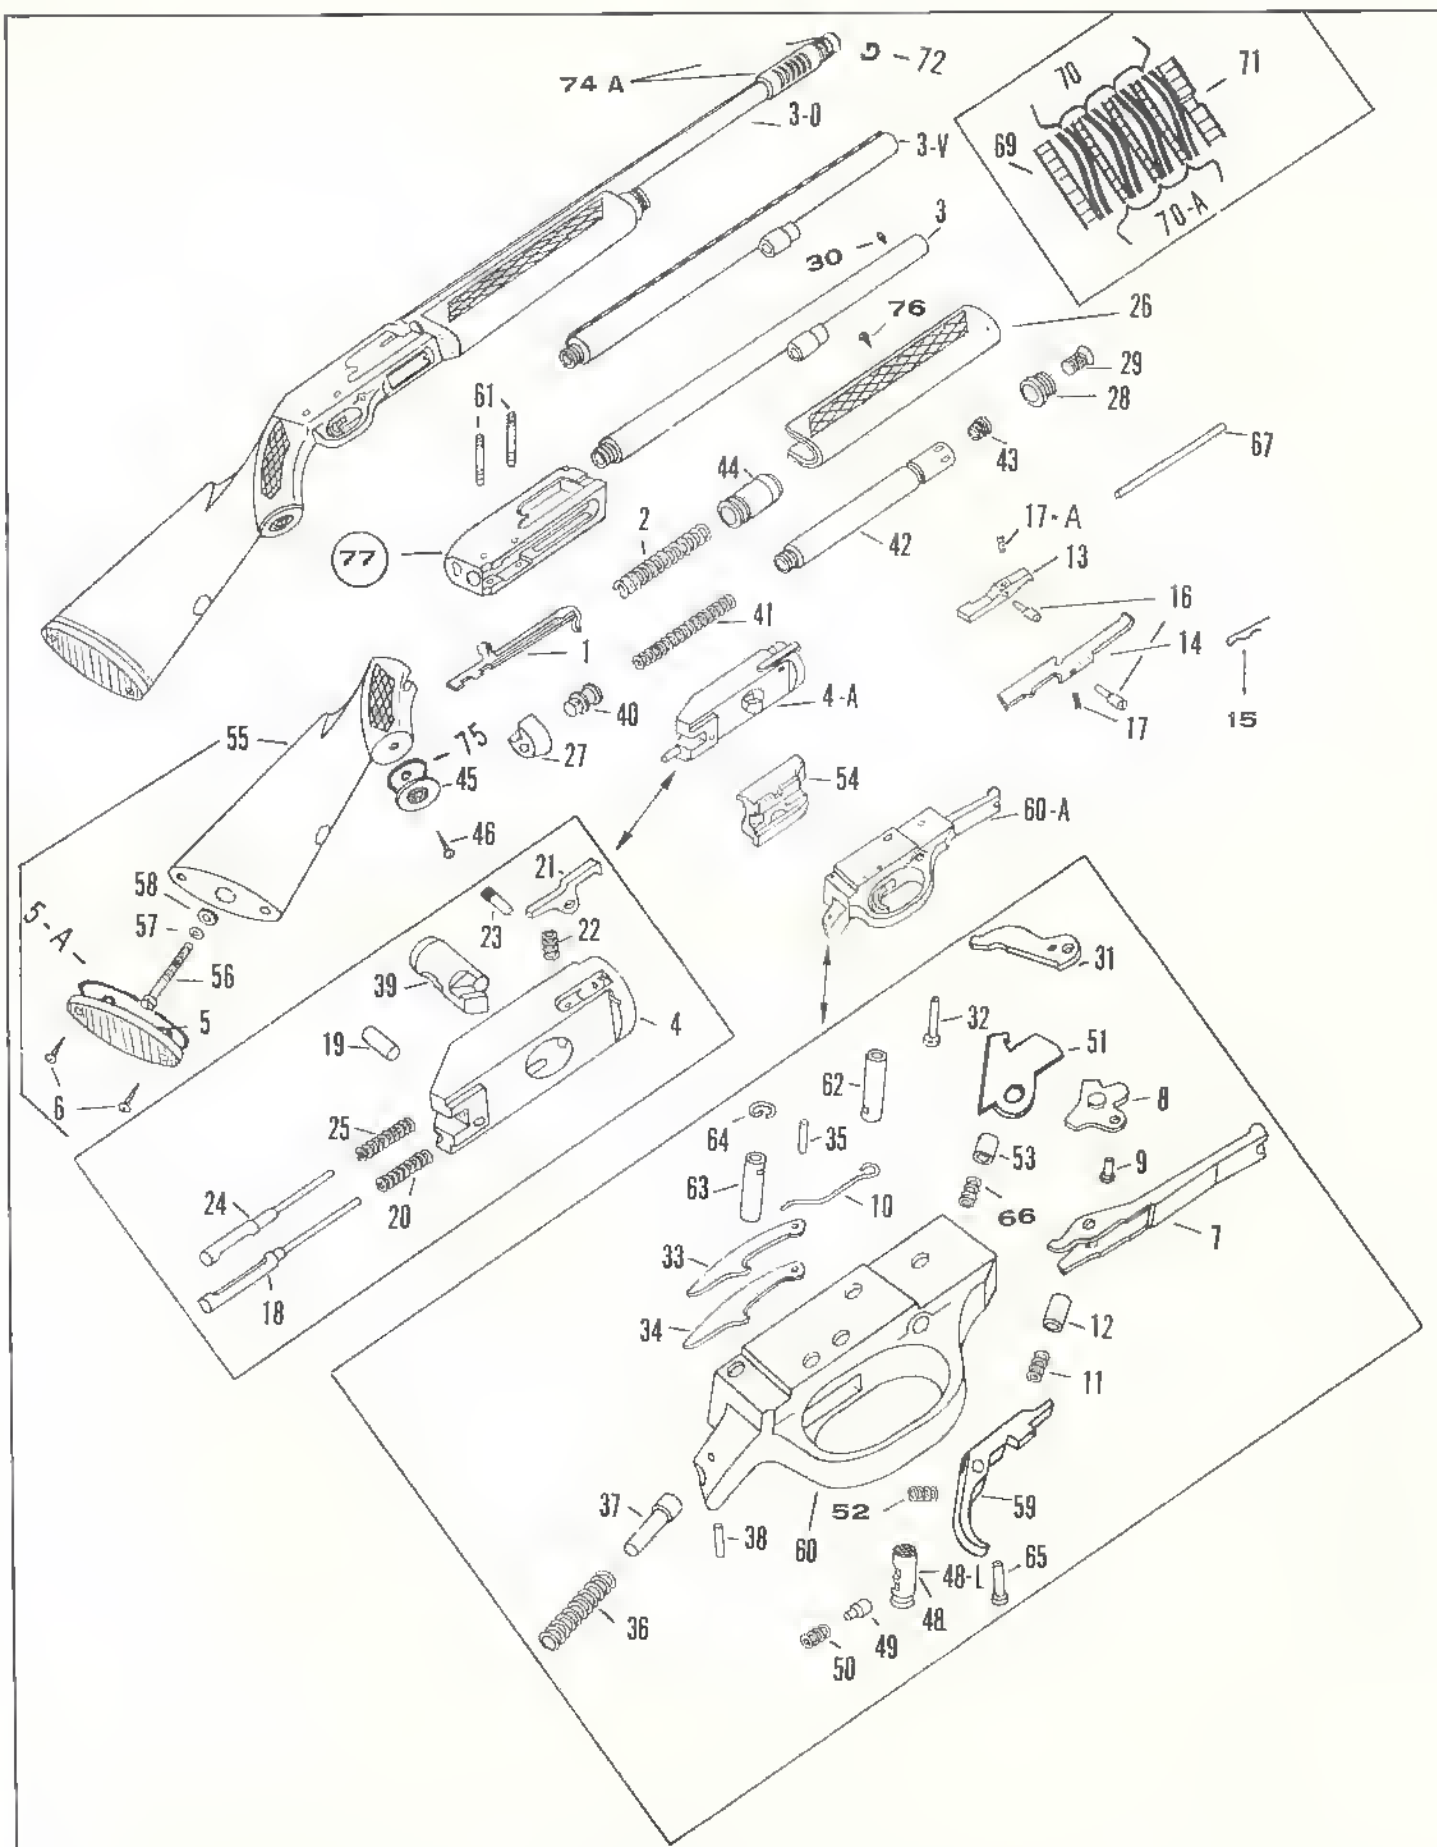

CAUTION: FOR SAFETY'S SAKE DO NOT ATTEMPT TO REPAIR SHOT GUN WITHOUT RECEIVING RELIABLE A

PARTS LIST FOR SUPERMATIC

**TROPHY
DUCK
CITATION
DELUXE
FIELD**

**CAT. #8230
CAT. #8240
CAT. #8220
CAT. #8210-8211-8212
CAT. #8200-8201-8202**

**MODEL C-100
MODEL C-100
MODEL C-100
MODEL C-100
MODEL C-100**

**WHEN ORDERING REPAIR PARTS, ALWAYS GIVE THE FOLLOWING INFORMATION
AS SHOWN IN THIS LIST:**

1. THE PART NUMBER.
2. THE PART NAME.
3. SHOTGUN MODEL NUMBER AND NAME.
4. THE CATALOG NUMBER.

All parts identified with an (*) must be fitted to the gun by qualified gunsmiths. (**) Sold for factory installation only. Return complete shotgun to factory. Do not order repair parts by key number, always use the part number.

(Prices Subject to Change Without Notice)

REF. NO.	PART NO.	DESCRIPTION	RETAIL PRICE EACH
1	757	Action Bar	7.50
2	733	Action Spring	.60
**3-D	8662	Barrel w/cyl.-Rib & Cage (Trophy)	43.00
**3-V	8676	Barrel w/cyl. & Rib 3" Chamber (Duck Only)	32.00
**N.I.	8652	Barrel w/cyl. & Cage	32.00
**3	8636	Barrel Plain w/cyl. Specify Choke (Deluxe)	25.00
**3	8609	Barrel Plain w/cyl. Specify Choke (Field)	25.00
*4	8621	Bolt	11.00
*4-A	8631	Bolt Assembly	19.00
5	8601	Bolt Plate	.75
N.I.	8671	Recoil Pad	1.50
5-A	8622	Bolt Plate Trim	.80
6	345	Bolt Plate Screws (2) ea.	.25
N.I.	152	Recoil Pad Screws (2) ea.	.25
7	8623	Cartridge Lifter	3.50
8	677	Cartridge Lifter Actuator Assy.	.80
9	610	Cartridge Lifter Hinge Pin	.25
10	675	Cartridge Lifter Actuator Spring	.25
11	897	Cartridge Lifter Spring	.25
12	689	Cartridge Lifter Spring Plunger	.25
13	612	Cartridge Stop R.H.	2.25
14	6687	Cartridge Stop L.H.	3.70
15	865	Cartridge Stop Retaining Clip (2) ea.	.25
16	864	Cartridge Stop Pin	.25
17	777	Cartridge Stop Spring L.H.	.25
17-A	656	Cartridge Stop Spring R.H.	.25
18	739	Ejector	.90
19	627	Ejector & Firing Pin Ret. Pin	.25
20	846	Ejector Retracting Spring	.25
21	755	Extractor R.H.	2.25
22	1022	Extractor Spring R.H.	.25
23	119	Extractor Pivot Pin	.25
24	626	Firing Pin	.90
25	628	Firing Pin Retracting Spring	.25
26	8632	Forehand Assy. (Checkered)	13.00

SERVICE. WE MAINTAIN A SERVICE DEPARTMENT WHICH WILL PROMPTLY GIVE YOU ADVICE AND SERVICE.

REF. NO.	PART NO.	DESCRIPTION	RETAIL PRICE EACH
N.I.	8606	Farehand Assy. (Plain)	10.00
27	6660	Farehand Base	1.50
28	8602	Farehand Cap	1.10
29	6653	Farehand Cap Screw	.25
30	130	Frant Sight	.25
*31	876	Hammer	1.90
32	699	Hammer Hinge Pin	.25
33	641	Hammer Strut R.H.	.25
34	642	Hammer Strut L.H.	.25
35	643	Hammer Strut Pin	.25
36	762	Hammer Spring	.25
37	639	Hammer Spring Guide	.25
38	676	Hammer Spring Ret. Pin	.25
*39	691	Lacking Pin	2.25
40	645	Magazine Fallawer	.25
41	646	Magazine Spring	.25
42	647	Magazine Tube	3.60
43	648	Magazine Tube Cap	.95
*44	651	Pistan	3.00
45	8625	Pistal Grip Cap (Grey)	.35
45	401	Pistal Grip Cap (Black)	.40
46	403	Pistal Grip Cap Screw	.25
48	8627	Safety Buttan R.H.	.75
49	605	Safety Spring Plunger	.25
N.I.	8628	Safety Buttan L.H.	1.00
50	155-B	Safety Plunger Spring	.25
*51	873	Escapement Haak	.80
52	649	Trigger Spring	.25
53	652	Trigger Spring Plunger	.25
54	8629	Slide	5.20
55	8634	Stack Assy. Checkered With Butt Plate & Screws	16.00
N.I.	8674	Stack Assy. Checkered With Recoil Pad & Screws	17.50
N.I.	8608	Stack Assy. Plain With Butt Plate & Screws	11.50
56	666	Stack Balt	.40
57	667	Stack Balt Lack Washer	.25
58	668	Stack Balt Washer	.25
*59	875	Trigger	3.60
60	746	Trigger Guard	5.50
60	6652	Trigger Guard (Duck Only)	5.50
60-A	8635	Trigger Guard Assy. (All Except Duck)	23.00
60-A	8675	Trigger Guard Assy. (Duck Only)	23.00
61	671	Trigger Guard Ret. Pin (2) ea.	.25
62	672	Trigger Guard Ret. Pin Bushing Frant	.45
63	673	Trigger Guard Ret. Pin Bushing Rear	.45
64	674	Trigger Guard Ret. Pin Bushing Ret. Spring	.25
65	699	Trigger Hinge Pin	.25
66	874	Escapement Haak Spring	.25
67	685	Waad Plug 8"	.25
*69	752	Cylinder Washer	.60
*70	735	Cylinder Wavy Springs (8) ea.	.25
*70-A	736	Cylinder Spacer Washer (3) ea.	.25
*71	754	Cylinder Nut	.60
72	11628	Chake Click Spring	.30
*73	8772	Chake Campensating Cage (Far Ribbed Barrel)	7.00
*73	8762	Chake Campensating Cage (Far Barrel without Rib)	7.00
74	766	Chake Cap	3.50
74-A	8775	Chake Assy. (Includes Campensating Cage, Element Cap & Spring) Far Gun w/a Rib	14.00
74-A	8765	Chake Assy. (Includes Campensating Cage, Element Cap & Spring) Far Gun w/Rib	14.00
N.I.	8774	Adjustable Chake (Includes Cap, Spring, and Element)	7.00
75	8626	Pistal Grip Cap Trim	.45
76	617	Drive Screw	.25
		(N.I. — Not Illustrated)	